

型 号	一次端电压 (KV)	二次端电压 (V)	剩余绕组电压 (V)	额定二次输出 (VA)				放电容量 (Mvar)
				0.2	0.5	1	6P	
FDGE11-6.3/√3-1.7-1W	6.3/√3	100/√3	100/3	30	50	100	100	1.7
FDGE11-6.3/√3-2.5-1W								2.5
FDGE11-6.3/√3-3.4-1W								3.4
FDGE11-6.6/√3-1.7-1W	6.6/√3							1.7
FDGE11-6.6/√3-2.5-1W								2.5
FDGE11-6.6/√3-3.4-1W								3.4
FDGE11-10/√3-1.7-1W	10/√3							1.7
FDGE11-10/√3-2.5-1W								2.5
FDGE11-10/√3-3.4-1W								3.4
FDGE11-11/√3-1.7-1W	11/√3							1.7
FDGE11-11/√3-2.5-1W								2.5
FDGE11-11/√3-3.4-1W								3.4

概述 Description


本型放电线圈为户外环氧树脂浇注全封闭型产品，其适用于额定频率50Hz,额定电压10kV及以下的电力系统中。与高压并联电容器组并联连接，当电容器组与系统断开后，可在5s内将电容器组上的剩余电压降至安全电压。在正常运行时，二次绕组可以做电压指示，用户如有特殊要求时，亦可带剩余电压绕组，起到继电保护作用。

This type of discharge coil is of outdoor epoxy resin casting full-sealed product. It is applicable to be used for the power system with AC frequency 50Hz and rated voltage 10kV and below. It is connected with high voltage parallel connection capacitor group. When capacitor group cuts off from the system, it can take only five second to reduce the residual voltage of the capacitor group to safe voltage. When operating is normal. The secondary winding is used as voltage indicator. If users have special requirements, it can have relay protection action with residual voltage winding.

外形及安装尺寸 Overall dimension drawing

上海互凌电气

021-31263333
www.fddg.cc

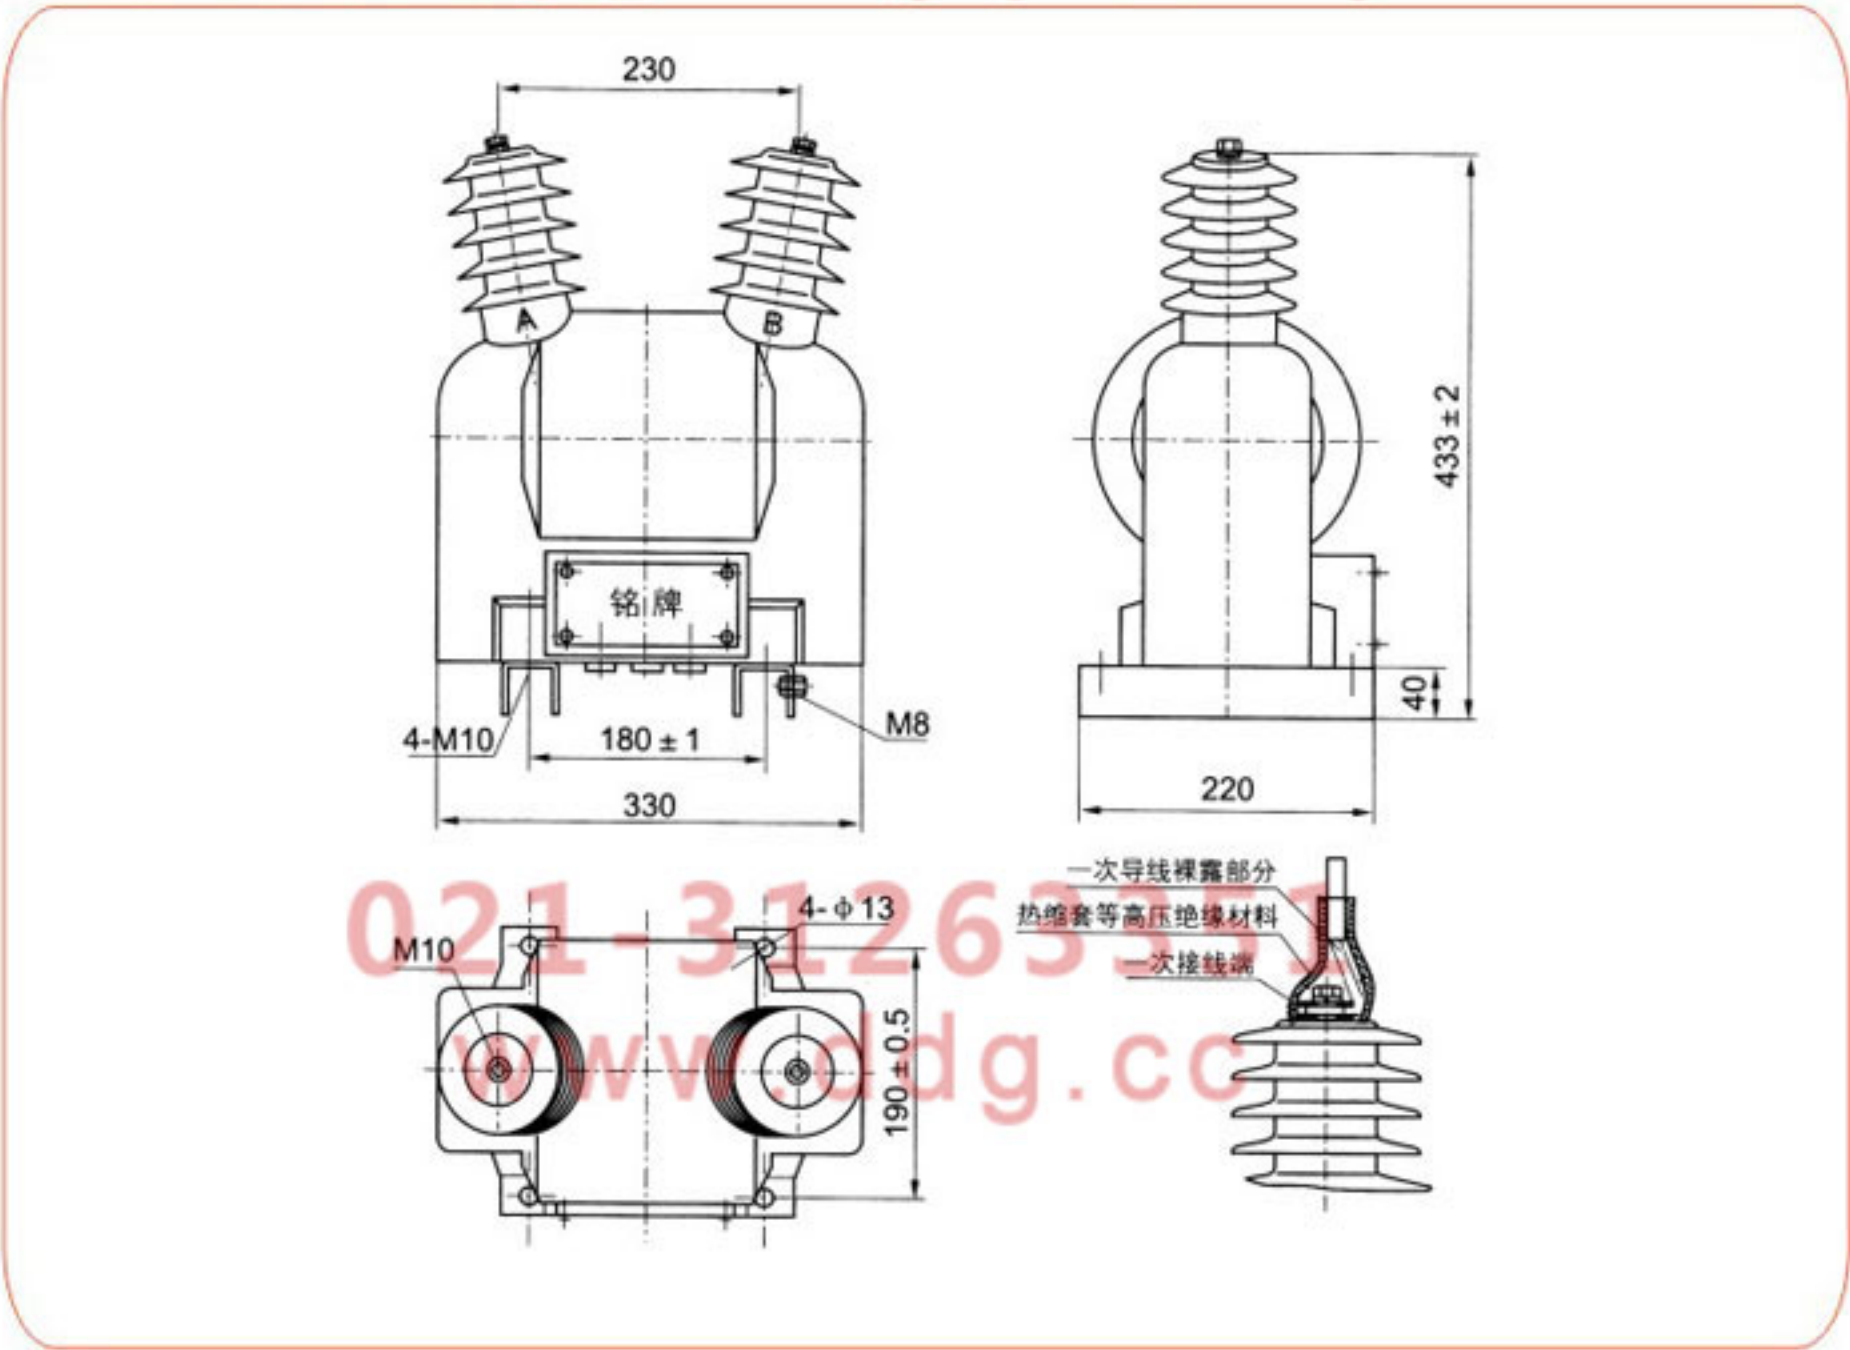

与电容器(组)连接方式 Way of connection with capacitor (bank)

