

户外 单相 油浸式  
OUTDOOR SINGLE-PHASE EPOXY RESIN CASTING TYPE

技术参数 Technical data

- 产品性能符合标准 GB1207和IEC60044-2  
The current transformers are in accordance with GB1207 and IEC60044-2 standards
- 额定绝缘水平 40.5/95/200kV  
Rated insulation level 40.5/95/200kV
- 额定频率50Hz或60Hz  
Rated frequency 50Hz or 60Hz



型号 Type	额定电压比 Rated voltage ratio (V)	准确级及额定二次输出 Accuracy class and rated secondary output(VA)					极限输出 Max.output (VA)	额定绝缘水平 Rated insulation level (kV)	接线图 Wiring diagram
		0.2	0.5	1	0.2/0.2 0.2/0.5	6P			
JDJ2-35	35000/100	75	150	250	/	/	1000	40.5/95/200	图1-2 Figure 1-2
JDJJ2-35	$\frac{35000}{\sqrt{3}} / \frac{100}{\sqrt{3}} / \frac{100}{3}$	75	150	250	/	100	1000		图3 Figure 3
	$\frac{35000}{\sqrt{3}} / \frac{100}{\sqrt{3}} / \frac{100}{\sqrt{3}} / \frac{100}{3}$	/	/	/	30/30 30/60	100	500/500		图4 Figure 4

概述 Description


本系列电压互感器为单相油浸产品，适用于额定频率50Hz或60Hz，额定电压35kV及以下的电力系统中，做电能计量、电压监控和继电保护用。

本系列电压互感器的铁心由条形硅钢片叠成，为三柱芯片，器身用铁夹件固定在箱盖上，在箱盖上装有一次及二次套管等，油箱用钢板焊成，油箱壁下部装有接地螺栓及放油塞，箱底有四个安装孔。

The voltage transformer of the type JDJ(J)2-35 is single phase and oil-immersed product. It is used for electric energy metering, voltage control and relay protection in the electric system of rated frequency 50Hz or 60Hz and rated voltage 35kV.

This voltage transformer has three poles and the iron core is made of silicon steel sheet. The body is fixed on the box cover by clamps. There have the primary and secondary bushing also on the box cover. The oil is made of steel sheet by welding, there are earth studs and oil drain plug on lower part of box wall, and four mounting holes in the bottom.

接线图 Wiring diagram

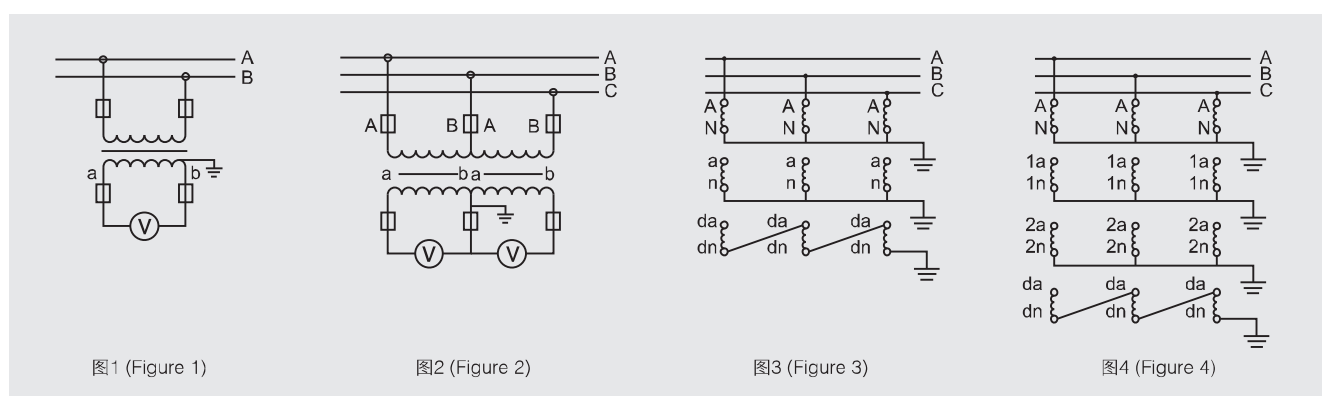

外形及安装尺寸 Overall dimension drawing

