

户外 单相 油浸式
OUTDOOR SINGLE-PHASE EPOXY RESIN CASTING TYPE

技术参数 Technical data

- 产品性能符合标准 GB1207和IEC60044-2
The current transformers are in accordance with GB1207 and IEC60044-2 standards
- 额定绝缘水平 40.5/95/200kV
Rated insulation level 40.5/95/200kV
- 额定频率50Hz或60Hz
Rated frequency 50Hz or 60Hz



型号 Type	额定电压比 Rated voltage (V)	准确级及额定二次输出 Accuracy class and rated secondary output(VA)					极限输出 Max.output (VA)	额定绝缘水平 Rated insulation level (kV)	接线图 Wiring diagram
		0.2	0.5	1	0.2/0.2 0.2/0.5	6P			
JD6-35	35000/100	75	150	250	/	/	1000	40.5/95/200	图1-2 Figure 1-2
JDX6-35	$\frac{35000}{\sqrt{3}} / \frac{100}{\sqrt{3}} / \frac{100}{3}$	75	150	250	/	100	1000		图3 Figure 3
	$\frac{35000}{\sqrt{3}} / \frac{100}{\sqrt{3}} / \frac{100}{\sqrt{3}} / \frac{100}{3}$	/	/	/	30/30 30/60	100	500/500		图4 Figure 4

概述 Description


本型电压互感器为单相户外用油浸式产品，适用于额定频率50Hz或60Hz、额定电压35kV的电力系统中，做电能计量、电压监测和继电保护用。

本型电压互感器的铁心为三柱式，在中柱上套有一、二次绕组，器身固定在油箱内，在油箱上部装有一次瓷套，瓷套顶端装有储油柜。产品为全密封结构，能有效地防止油老化。

The type voltage transformer of the types JD6-35 and JDX6-35 are single phase and oil-immersed products. There are used for electric energy metering, voltage control and relay protection in the electric system to rated frequency 50Hz or 60Hz and rated voltage 35kV.

The type voltage iron core of this voltage transformer is three type. Around the middle post there is the primary and secondary winding. There is porcelain bush on top of oil box. and oil conservator no top of porcelain bush. The body is fixed in the box. Being a fully enclosed construction, it is effective to prevent oil from ageing.

接线图 Wiring diagram

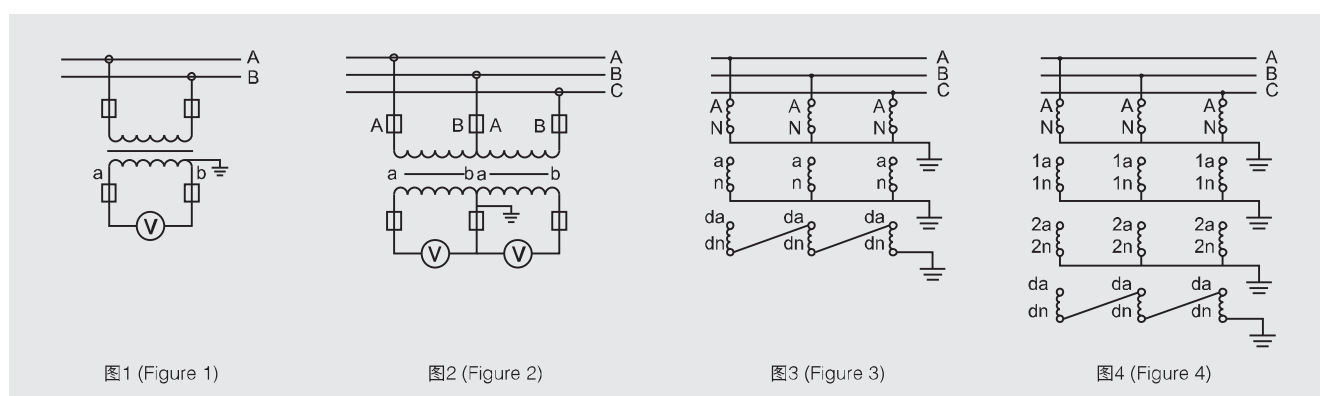

外形及安装尺寸 Overall dimension drawing

