

户内 单相 环氧树脂浇注式
INDOOR SINGLE-PHASE EPOXY RESIN CASTING TYPE


技术参数 Technical data

- 产品性能符合标准 GB1207和IEC60044-2
The current transformers are in accordance with GB1207 and IEC60044-2 standards
- 额定绝缘水平 40.5/95/200kV
Rated insulation level 40.5/95/200kV
- 额定频率50Hz或60Hz
Rated frequency 50Hz or 60Hz



型号 type	额定电压比 Rated voltage ratio (kV)	额定二次输出 Rated secondary output(VA)							极限输出 Max.output (VA)	额定绝缘水平 Rated insula- tion level (kV)	备注 Notes	接线图 Wiring diagram
		0.2	0.5	1级	3级	$\frac{0.2/0.2}{0.2/0.5}$	0.5/0.5	6P(3P)				
JDZ9-35Q	35000/100	60	120	240	600	/	/	/	800	40.5/95/200	等同 “VKV” Same “VKV”	图1-图2 Figure1-2
	35000/100/100	/	/	/	/	30/30	40/40	/	500/500			图3-图4 Figure3-4
JDZX9-35G	$\frac{35000}{\sqrt{3}} / \frac{100}{\sqrt{3}} / \frac{100}{3}$	30	90	180	500	/	/	100	600			图5 Figure5
	$\frac{35000}{\sqrt{3}} / \frac{100}{\sqrt{3}} / \frac{100}{\sqrt{3}} / \frac{100}{3}$	/	/	/	/	$\frac{15/15}{15/20}$	45/45	100	300/300			图6 Figure6

外形及安装尺寸
Overall dimension drawing

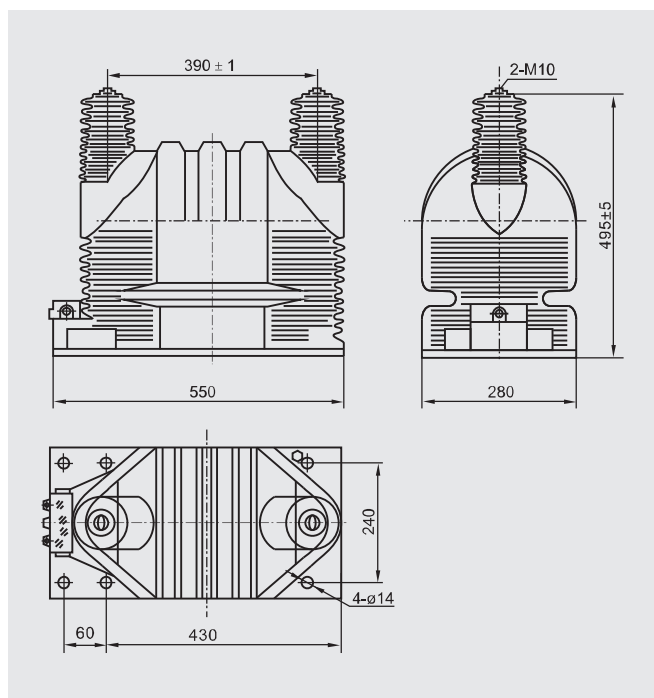

接线图
Wiring diagram

