


技术参数 Technical data

额定电压比 Rated voltage ratio(V)	准确级 Accuracy classes	额定输出 Rated output(VA)	额定绝缘水平 Rated insulation level (kV)
$\frac{33000}{\sqrt{3}} / \frac{110}{\sqrt{3}} / \frac{110}{3}$	0.2	40	40.5/95/185
$\frac{35000}{\sqrt{3}} / \frac{100}{\sqrt{3}} / \frac{100}{3}$	0.5	60	

额定电压比 Rated voltage ratio(A)	准确级 Accuracy classes	额定输出 Rated output(VA)	额定短时热电流 (I <sub>th</sub> ) Rated short-time thermal current	额定动稳定电流 (I <sub>dyn</sub> ) Rated dynamic current	额定绝缘水平 Rated insulation level (kV)
5 ~ 300/5	0.2S	15	60I <sub>n</sub>	150I <sub>n</sub>	40.5/95/185
	0.2	15			
	0.5	20			

外形及安装尺寸 Overall dimension drawing

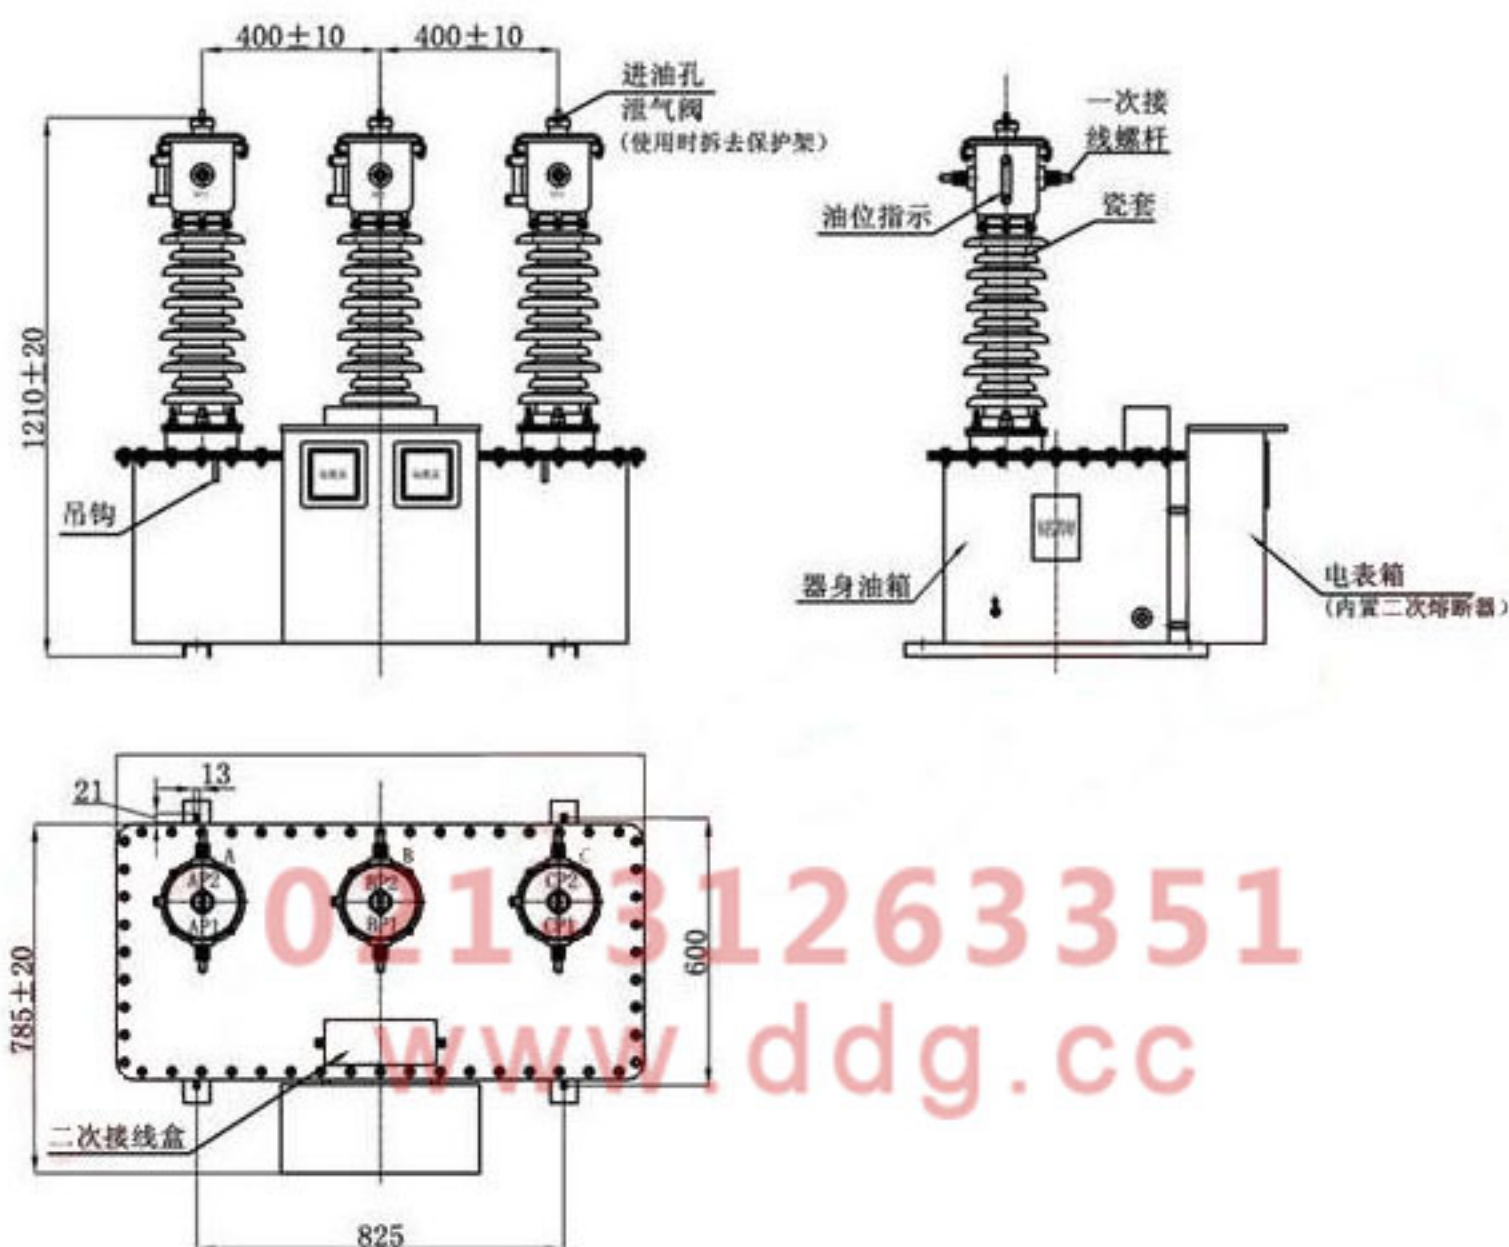

接线图 Wiring diagram

