

户外 三相 环氧树脂浇注式
 OUTDOOR THREE-PHASE EPOXY RESIN CASTING TYPE


技术参数 Technical data

- 产品性能符合标准 GB1207和IEC60044-2
 The current transformers are in accordance with GB1207 and IEC60044-2 standards
- 额定绝缘水平 12/42/75、7.2/32/60kV
 Rated insulation level 12/42/75kV、7.2/32/60kV
- 额定频率50Hz或60Hz
 Rated frequency 50Hz or 60Hz



额定电压比 Rated voltage ratio (V)	准确级及额定二次输出 Accuracy class and rated secondary output(VA)					极限输出 Max. output (VA)	额定绝缘水平 Rated insulation level (kV)
	0.2	0.5	0.2/0.5	0.5/0.5	6P		
$\frac{3000}{\sqrt{3}} / \frac{100}{\sqrt{3}} / 100$	60	120	/	/	100	1000	3.6/25/40
$\frac{6000}{\sqrt{3}} / \frac{100}{\sqrt{3}} / 100$							7.2/32/60
$\frac{10000}{\sqrt{3}} / \frac{100}{\sqrt{3}} / 100$	75	150	50/80	90/90		1500	12/42/75
$\frac{6000}{\sqrt{3}} / \frac{100}{\sqrt{3}} / \frac{100}{\sqrt{3}} / 100$	/	/				75/120	120/120
$\frac{10000}{\sqrt{3}} / \frac{100}{\sqrt{3}} / \frac{100}{\sqrt{3}} / 100$			1500	12/42/75			


外形及安装尺寸 Overall dimension drawing

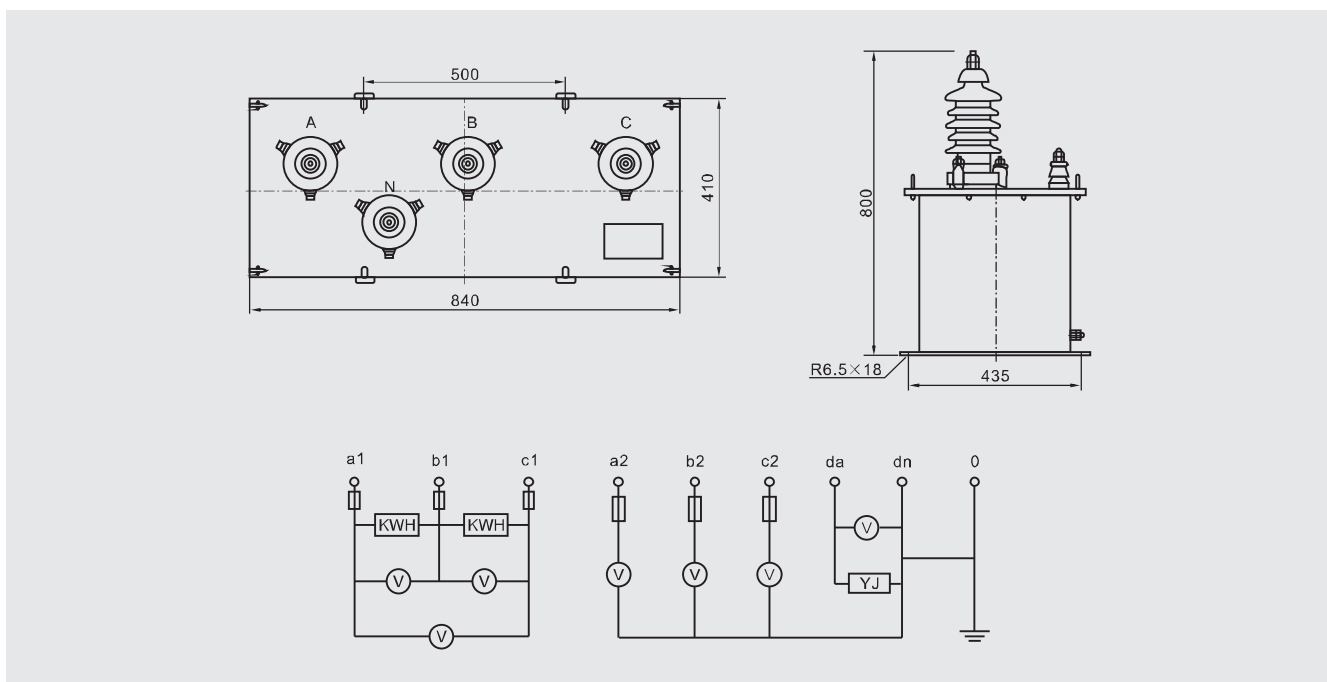

接线图 Wiring diagram

计量接线原理图

Single measurement wiring elementary diagram

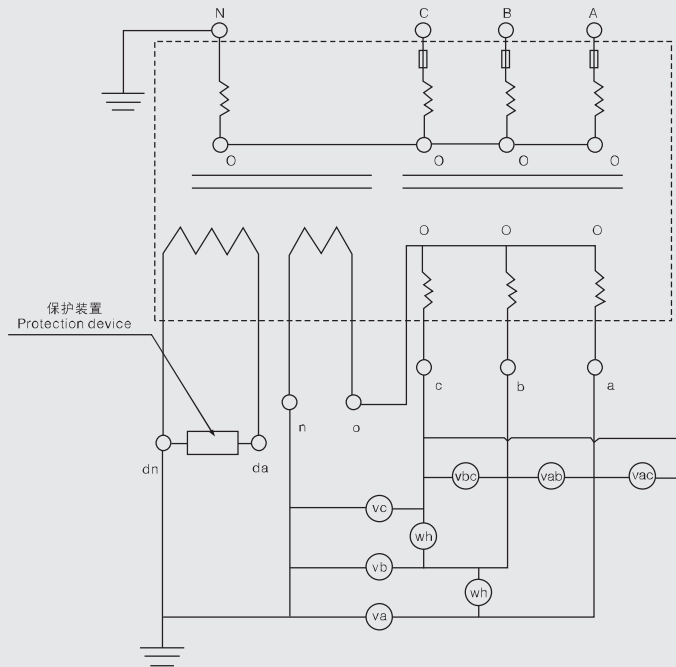

双计量接线原理图

Double measurement wiring elementary diagram

