

户内 单相 环氧树脂浇注式
INDOOR SINGLE-PHASE EPOXY RESIN CASTING TYPE

技术参数 Technical data

- 产品性能符合标准 GB1208和IEC60044-1
The current transformers are in accordance with GB1208 and IEC60044-1 standards
- 额定绝缘水平 12/42/75kV
Rated insulation level 12/42/75kV
- 额定二次电流: 5A或1A
Rated secondary current 5A or 1A
- 额定频率50Hz或60Hz
Rated frequency 50Hz or 60Hz
- 环境温度: -5℃~+40℃
Ambient temperature -5℃~+40℃



LFS-10Q 型 Type


额定一次电流 Rated primary current(A)	准确级组合 Accuracy classes combination	额定二次输出 Rated secondary output(VA)			一秒热稳定电流 1s thermal current(kA)	动稳定电流 Rated dynamic current(kA)
		0.2(S)	0.5(S)	10P10		
5-200	0.2(S)/0.2(S) 0.2(S)/0.5(S) 0.5(S)/0.5(S) 0.2(S)/10P10 0.5(S)/10P10	10	15		100lin	250lin
250					27	67.5
300					36	80
400					45	90
500、600					56	100
750、800					63	100
1000					80	130

LFSQ-10Q 型 Type


额定一次电流 Rated primary current(A)	准确级组合 Accuracy classes combination	额定二次输出 Rated secondary output(VA)					一秒热稳定电流 1s thermal current(kA)	动稳定电流 Rated dynamic current(kA)
		0.2S	0.5S	0.2	0.5	10P		
5	0.2(S)/0.2(S) 0.2(S)/0.5(S) 0.5(S)/0.5(S) 0.2(S)/10P10 0.5(S)/10P10	10		10	10	10	0.8	2
10							1.6	4
15							6.3	15
20、25							9.3	23
30							12.5	31.5
40、50							18	45
75							36	90
100-250							45	100
300	0.2(S)/0.2(S) 0.2(S)/0.5(S) 0.5(S)/0.5(S) 0.2(S)/10P15 0.5(S)/10P15			15	15	15	63	100
400					20	20		
500					30	30		
600-800				20	30	40	80	130
1000-1600				30	40			

外形及安装尺寸 Overall dimension drawing

LFS-10Q 5-1000A

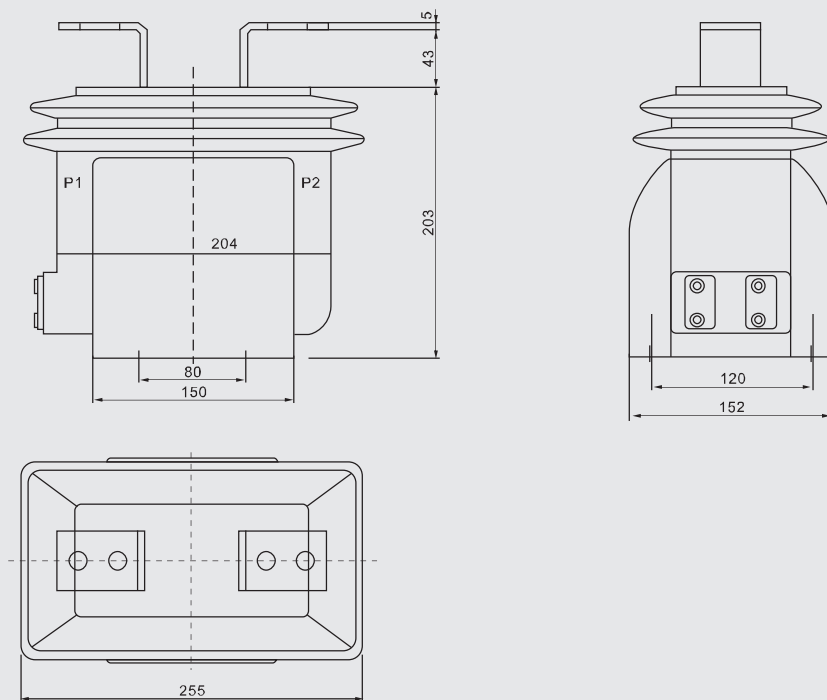

LFSQ-10Q 5-1600A

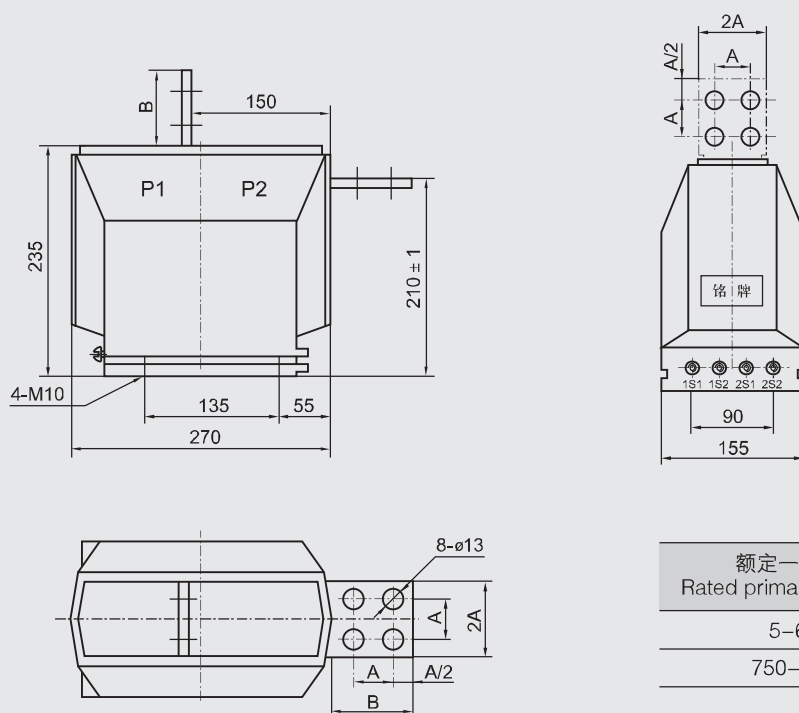

额定一次电流 Rated primary current(A)	A	B
5-600	30	65
750-1600	40	85