

户外 单相 环氧树脂浇注式
OUTDOOR SINGLE-PHASE EPOXY RESIN CASTING TYPE


技术参数 Technical data

- 产品性能符合标准 GB1208和IEC60044-1
The current transformers are in accordance with GB1208 and IEC60044-1 standards
- 额定绝缘水平 40.5/95/185kV
Rated insulation level 40.5/95/185kV
- 额定频率50Hz或60Hz
Rated frequency 50Hz or 60Hz
- 额定二次电流：5A或1A
Rated secondary current 5A or 1A
- 环境温度：-25℃~+40℃
Ambient temperature -25℃~+40℃



额定一次电流 Rated primary current(A)	准确级组合 Accuracy classes combination	额定二次输出 Rated secondary output(VA)				一秒短时热电流 1s short-time thermal current(kA)	动稳定电流 Rated dynamic current (kA)
		0.2S	0.2	0.5	10P10		
30-100	0.2/0.2 0.2/0.5 0.5/0.5 0.2/10P10 0.5/10P10 0.2S/0.5/10P10	15	30	30	50	150 lth/2	375 lth
150						31.5/1	80
200						31.5/2	80
300-500						31.5/3	80
600-800			31.5/4	80			
1000-2000			40/4	100			

外形及安装尺寸 Overall dimension drawing

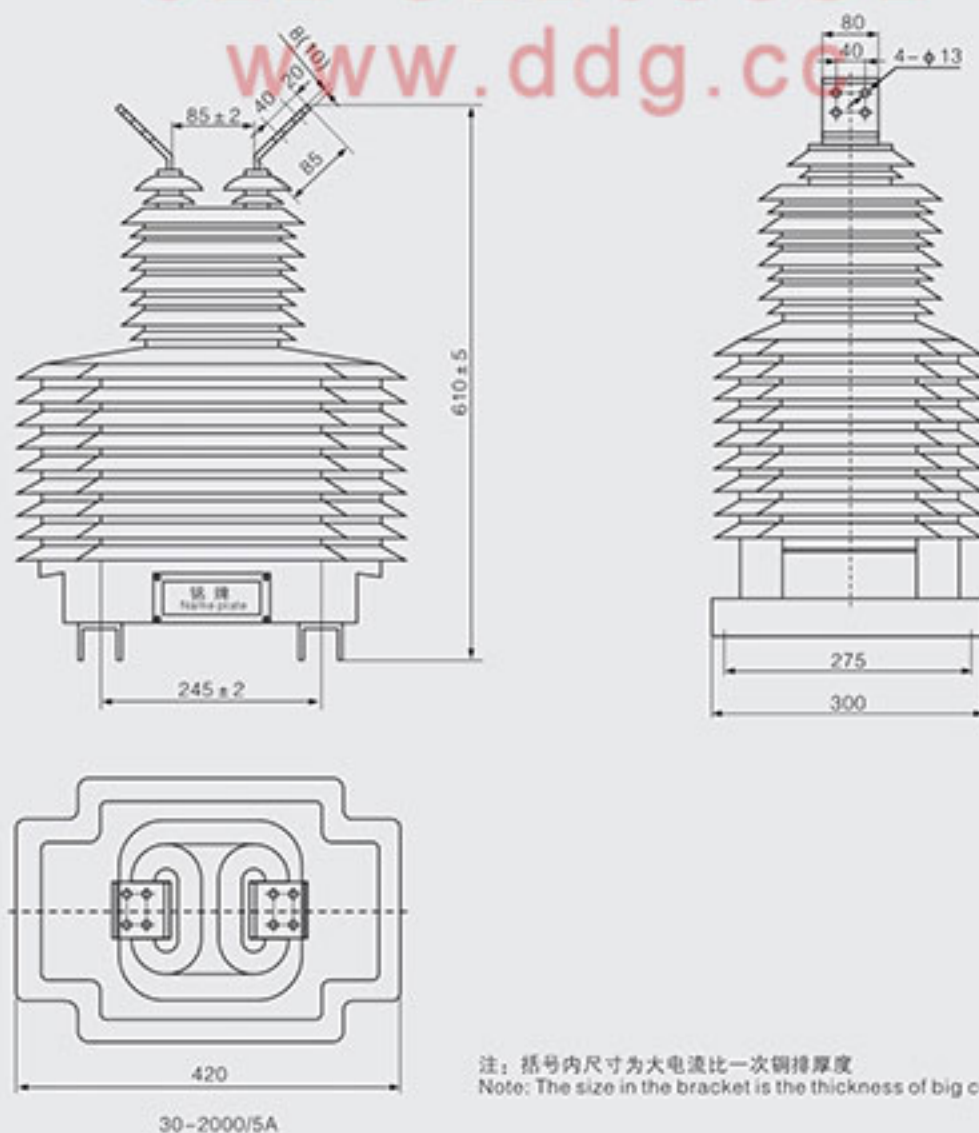

Note: The size in the bracket is the thickness of big current-ratio primary copper