




### ◆ 型号含义 Type description

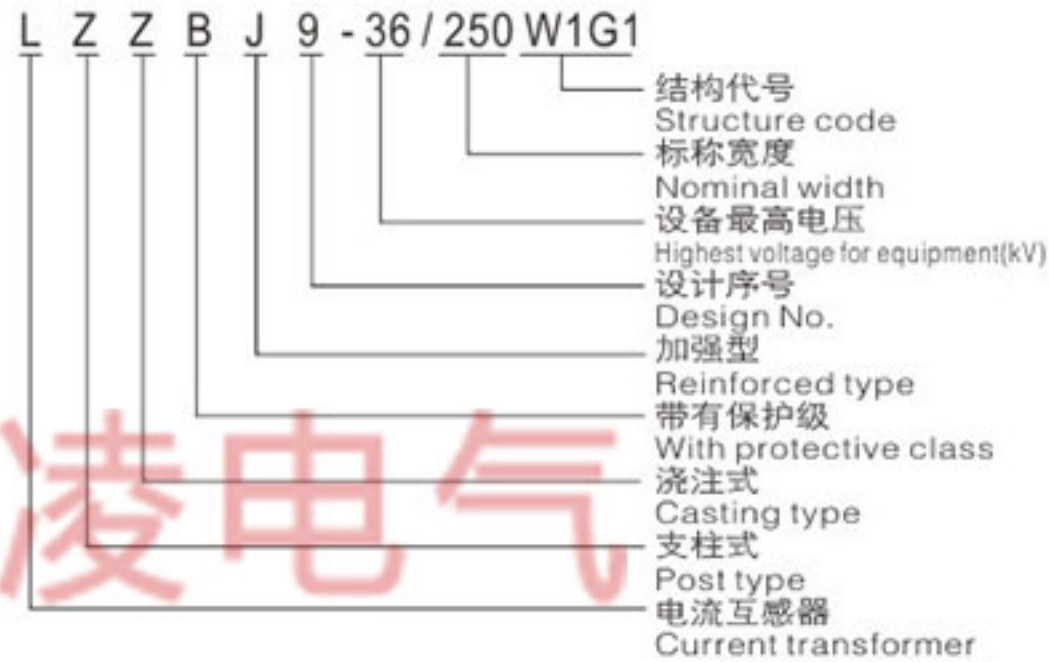

### ◆ 技术参数 Technical data

产品型号 Type	额定一次电流 Rated primary current lin(A)	级次组合 Accuracy Classes combination	额定二次输出 Rated secondary output(VA)			短时热电流 Short-time thermal current(kA/S)	额定动稳定电流 Rated dynamic current(kA)
			0.2	0.5	5P20		
LZZBJ9-36	20-100	0.2/0.2	10	15	15	200lin	500lin
	150-200	0.2/0.5	10	15	15	31.5	80
	300-500	0.5/0.5	10	15	15	31.5/2	80
	600-1250	0.2/5P20	15	30	20	31.5/4	80
	1500-2000	0.5/5P20	20	40	30	40/4	125
	2500	0.5/5P20	20	40	20	40/4	125

注：用户如有特殊要求可与我公司协商确定，动热稳定可按用户要求。

Note: Any special requirements can be negotiated with us, thermal and heat both stable, we can customized your requirement.

### ◆ 外形及安装尺寸 Overall dimension drawing

