


户内 单相 环氧树脂浇注式
INDOOR SINGLE-PHASE EPOXY RESIN CASTING TYPE




技术参数 Technical data

- 产品性能符合标准 GB1207和IEC60044-2
The voltage transformers are in accordance with GB1207 and IEC60044-2 standards
- 额定绝缘水平 12/42/75、7.2/32/60kV
Rated insulation level 12/42/75、7.2/32/60kV
- 额定频率50Hz或60Hz
Rated frequency 50Hz or 60Hz

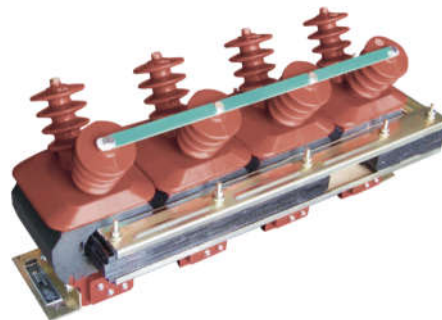

型号 Item	额定电压比 Rated voltage ratio (kV)	准确级或准确级组合 Accuracy classes or Accuracy classes combination	额定二次输出 Rated secondary output(VA)	热极限 输出(VA)	额定绝缘 水平(kV)	接 线 图	表面爬电 距离(mm)	重量(kg)
JSZJK-3	3/√3/0.1/√3/0.1	0.2/6P(3P) 0.5/6P(3P) 1/6P(3P) 3/6P(3P)	3×20/100 3×50/100 3×80/100 3×150/100	3×400	3.6/25/40	图1	310	82
JSZJK-6	6/√3/0.1/√3/0.1				7.2/32/60			
JSZJK-10	10/√3/0.1/√3/0.1				12/42/75			
JDZJK-3	3/√3/0.1/√3/0.1/√3/0.1	0.2/0.2/6P(3P) 0.2/0.5/6P(3P) 0.5/0.5/6P(3P)	3×10/3×10/100 3×10/3×15/100 3×20/3×20/100	3×200 3×200	3.6/25/40	图2		
JDZJK-6	6/√3/0.1/√3/0.1/√3/0.1				7.2/32/60			
JDZJK-10	10/√3/0.1/√3/0.1/√3/0.1				12/42/75			

外形及安装尺寸 Overall dimension drawing

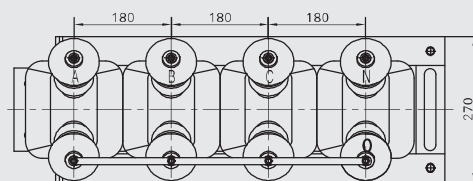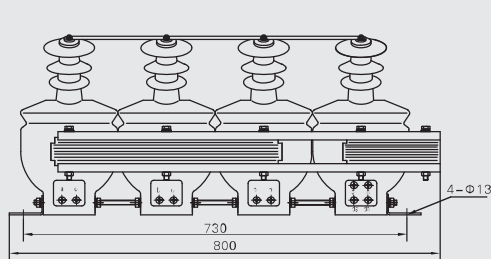

接线图

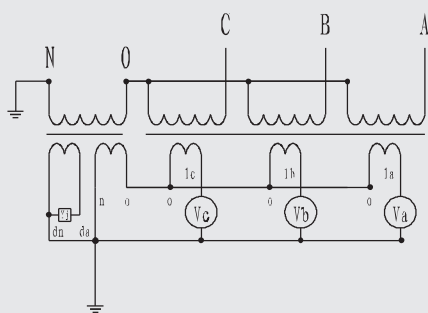


图1

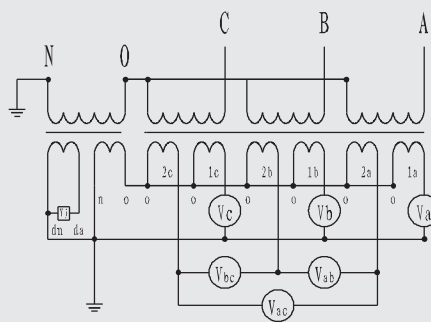


图2